

Active Noise Control for Acoustic Sensors

Presented at

**DARPA Air-Coupled Acoustic Microsensors Workshop
August 24-25, 1999
Crystal City, VA**

Larry Riddle, Ph.D.

Signal Systems Corporation

877 Baltimore and Annapolis Boulevard, Suite 210

Severna Park, MD 21146

lriddle@signalsystemscorp.com

www.signalsystemscorp.com

410-431-7148



Active Noise Control



- Application Areas in Acoustics
 - Industrial Noise and Vibration Reduction
 - Acoustic Stealth
 - *Acoustic Sensor Interference Rejection (Presentation Emphasis)*
- Acoustic Sensor Interference Rejection Applications
 - Unmanned Vehicle Acoustic Sensors
 - *Undersea Weapons*
 - *Unmanned Ground Vehicles*
 - Internetted Unmanned Ground Sensors
 - Surveillance Systems
 - Communications Intelligence
 - Speech Recognition
 - Biomedical Acoustic Sensors
 - Multistatic Active Sonar

Air Coupled Acoustic Microsensor Technology Applications

- **Wideband Self Noise Cancellation**
 - Reduce broad band self-noise by > 15 dB while retaining low far-field signal distortion
 - Develop coherent wind noise reduction techniques
 - Improve wind noise reduction by at least 20 dB using new sensors and adaptive noise control technology when compared to passive foam windscreens
 - Improves surveillance detection and classification performance
- **Acoustic Skin**
 - Conformal acoustic surveillance array
 - Integrated MEMS sensors, electronics and VLSI analog controller
 - Unobtrusive, compact and low cost



Self Noise Reduction for Acoustic Sensors

Demo III Experimental Unmanned Vehicle (XUV) Built By Robotic Systems Technology

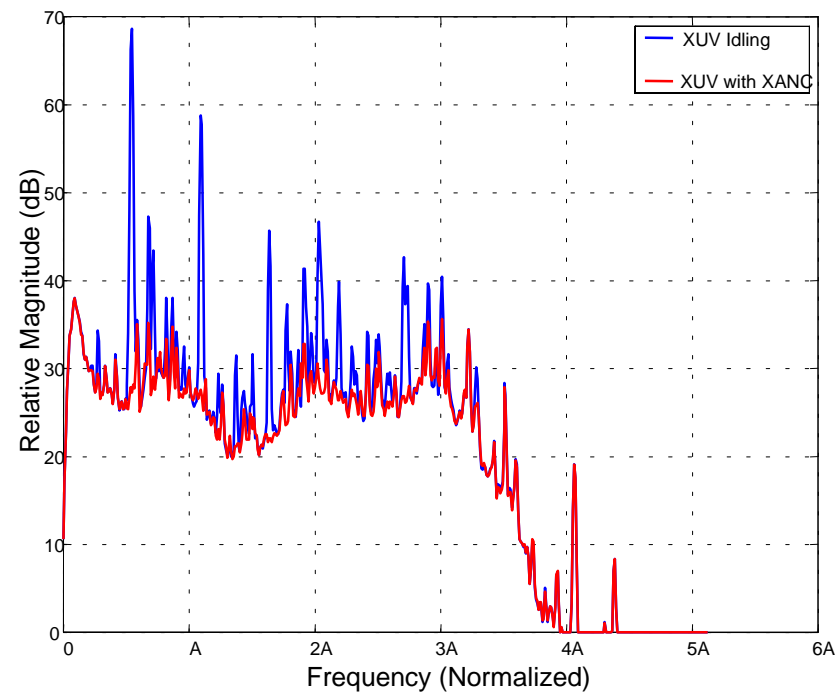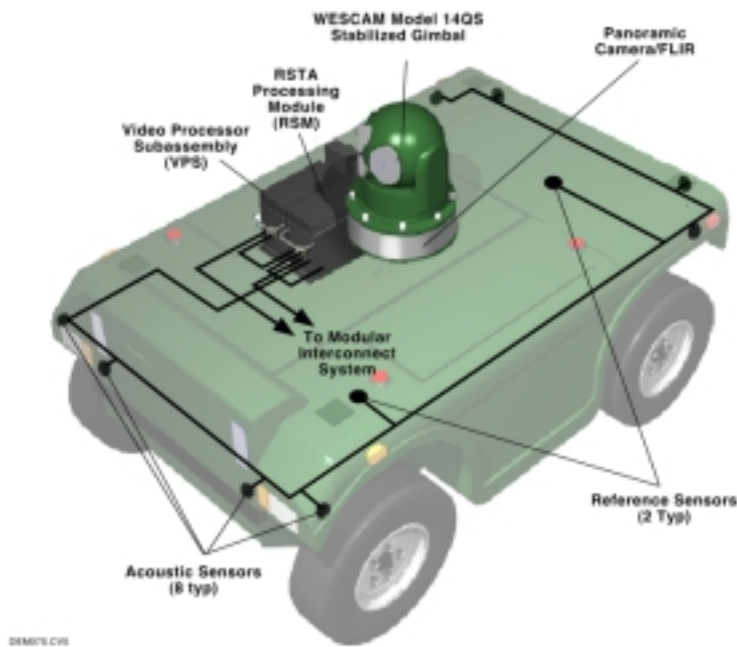

Self noise reduction uses adaptive noise control techniques with microphone arrays and reference accelerometers

Composite Smart Materials (CSM)

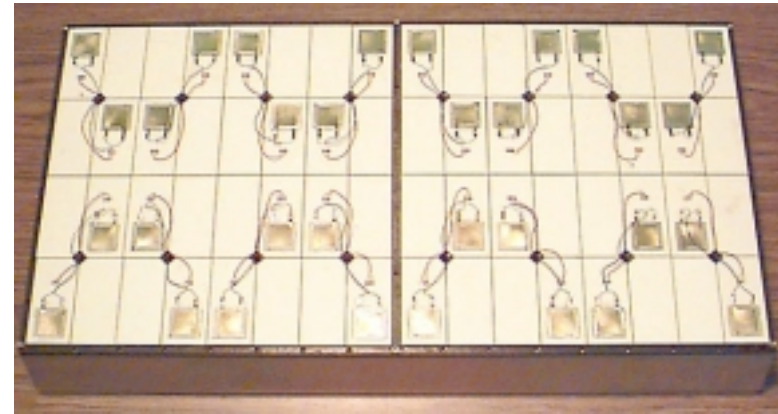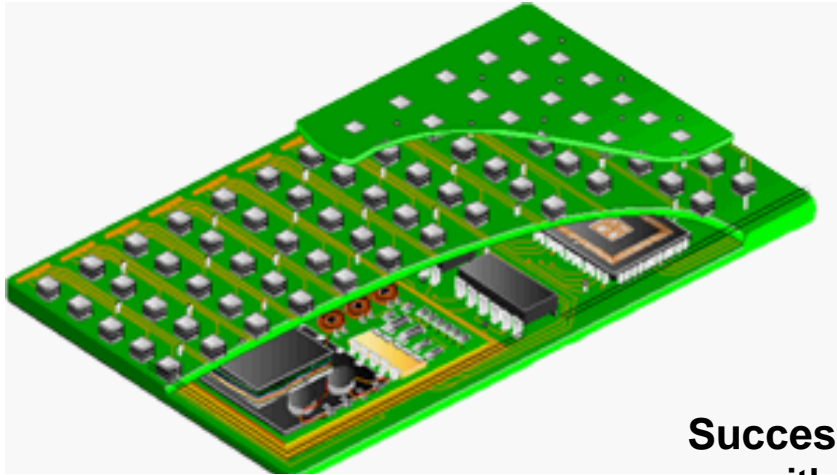

Successfully Demonstrated First Truly Smart Material
with Polyvinylidene fluoride (PVDF) pressure sensors
Micro-machined piezoelectric accelerometers

PMN Actuators

Embedded Electronics

DARPA/ONR Sponsored

Team Members

Lockheed Martin Advanced Technology Center


Active Signal Technologies

Naval Research Laboratory

Signal Systems Corporation



Virginia Power Technologies

Virginia Tech

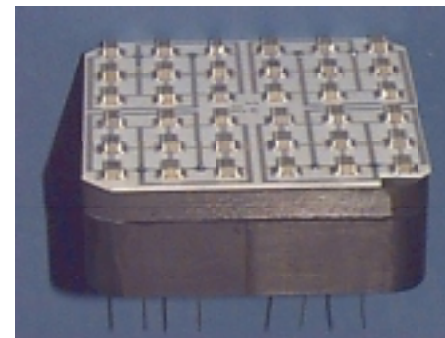

3" Piston PMN
Actuator with
Integrated
Sensor and
Power Amplifier
Electronics

Hierarchical Control Systems Using Frequency Scheduled Control

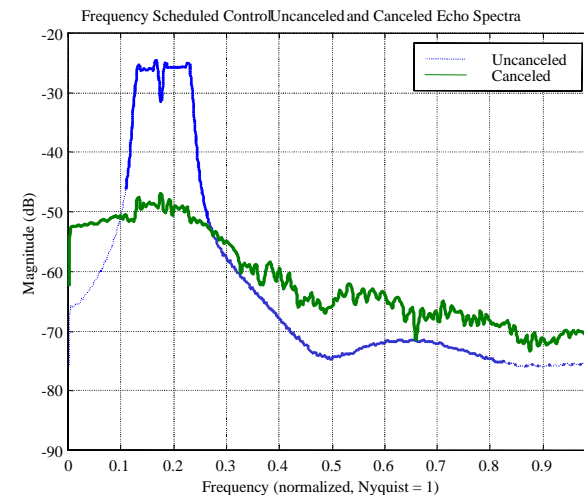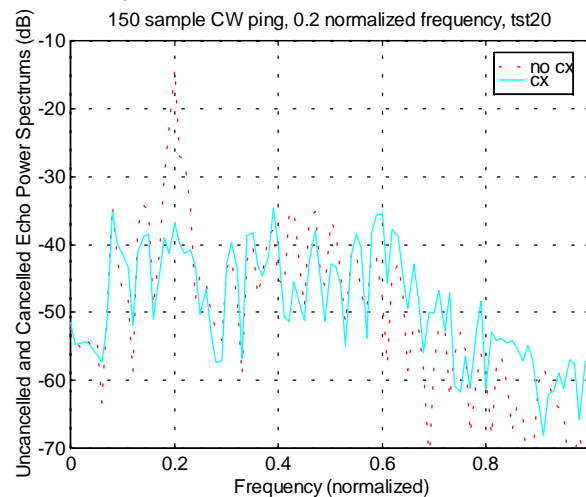


Reference: L. Riddle and J. Murray, 'Smart Structure Active Sonar Echo Cancellation Using Frequency Scheduled Control, Applications of Smart Structures Technologies, San Diego CA March 3-5, 1998.




Smart Sleeve Self Noise Power Flow Isolation

DARPA/ONR Sponsored
Lockheed Martin Advanced Technology Center
Active Signal Technology
Signal Systems Corporation
NUWC
Fuller Technology Inc.
Virginia Power Technologies

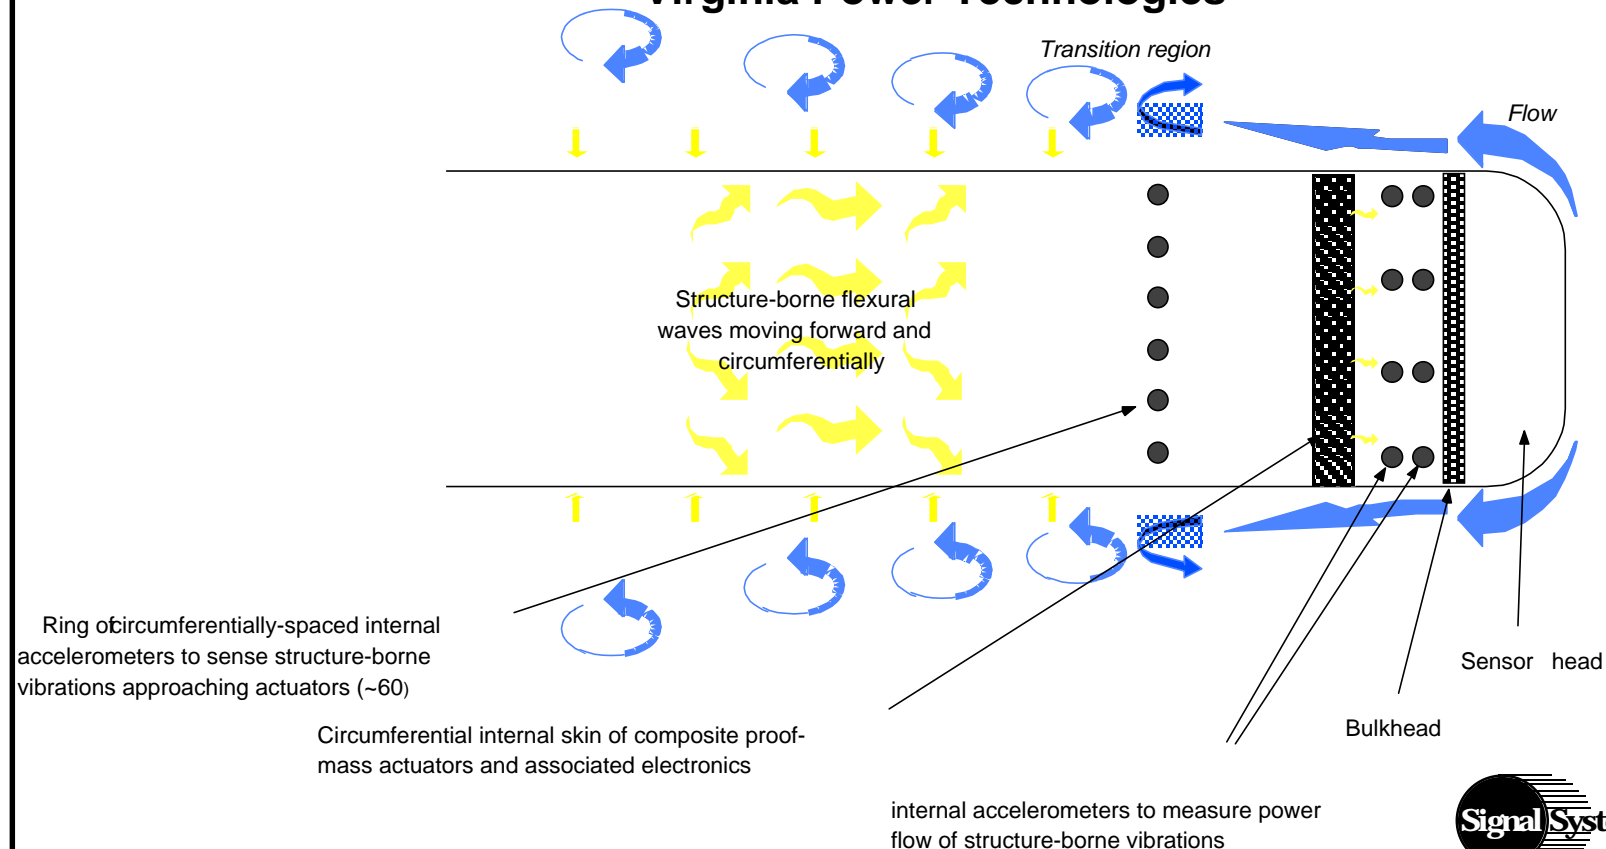


S2D Uses a Distributed Hierarchical Control System to Achieve Smart Material Control


- High speed /wide band central control
- Controller sample rate $> 80 \text{ kHz}$
- Fan-in/fan-out with gain to interconnect with large numbers of sensor and actuators
- Hardware built to fit as a skin, with distributed processing and no backplane
- Single channel demo is a partial build of the full control architecture
- Genetic algorithm reconfiguration of sensors

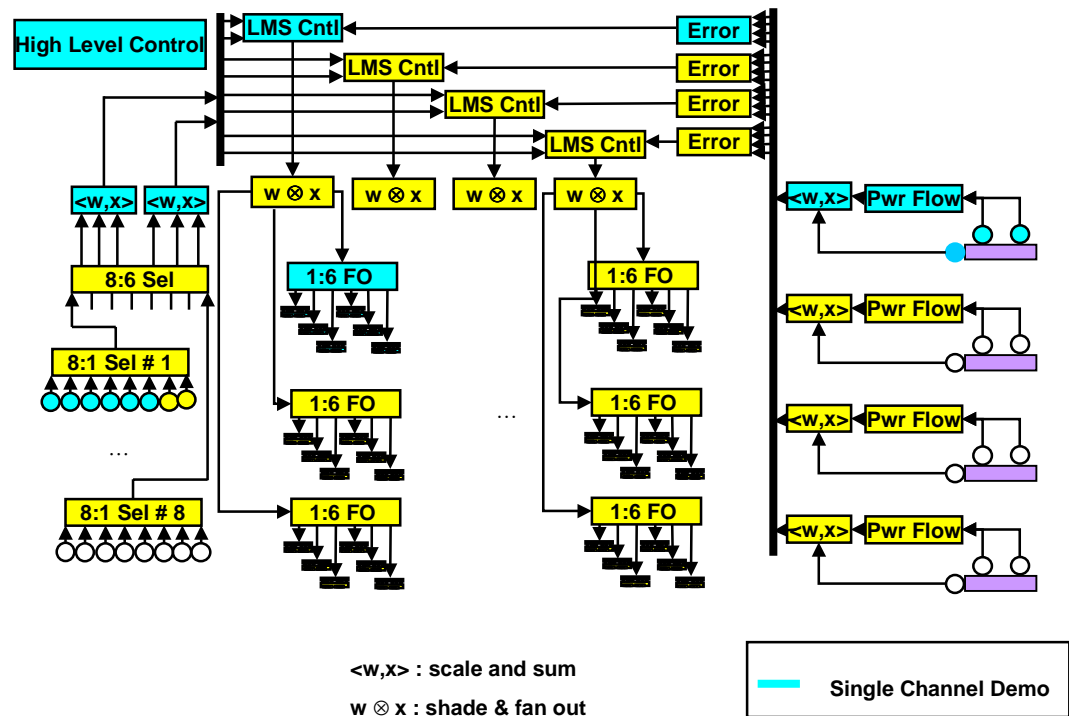

DSP Based Controller

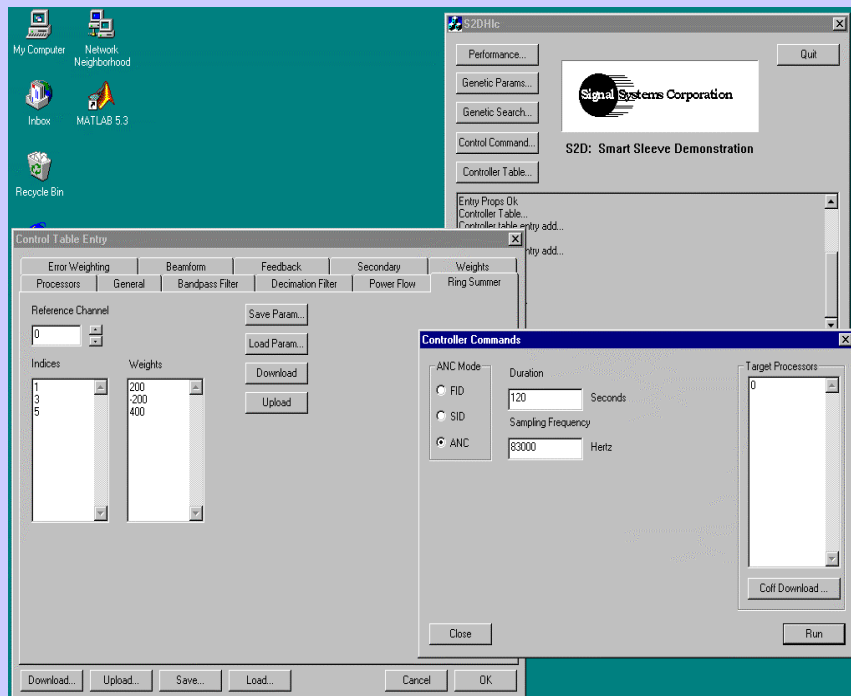


Active Noise Controller SW
>80 kHz sample rate, 2 reference ch
wavenumber error filters
Regulation BW: 3 kHz @ > 10 dB CX
Tunable band selection
In-situ system ID and optimization

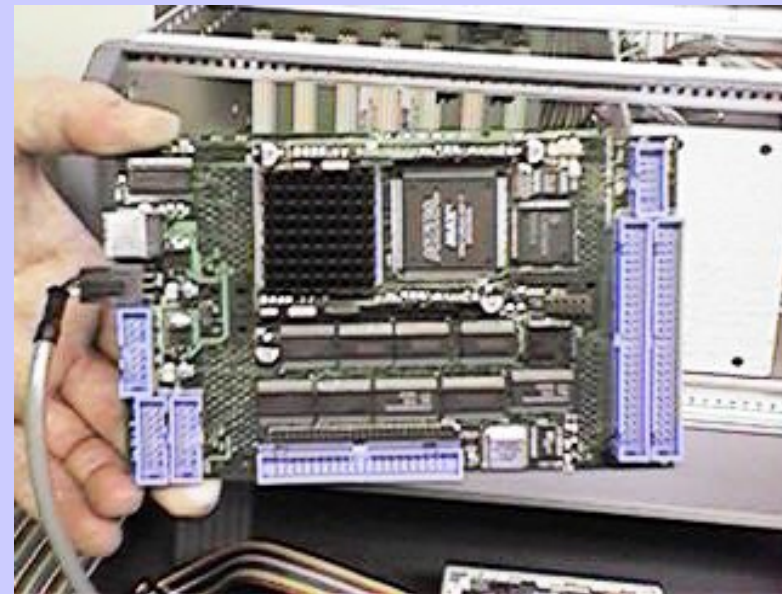

Active Noise Control HW
16 Ch. I/O with anti-alias/anti-imposter
filters, 16 bit ADC/DAC, TMS320C62
DSP @ 160 MHz
Compatible with Embedded Skin
Applications

Smart Sleeve Single Channel Test Results

3 Khz Bandwidth Power Flow Control

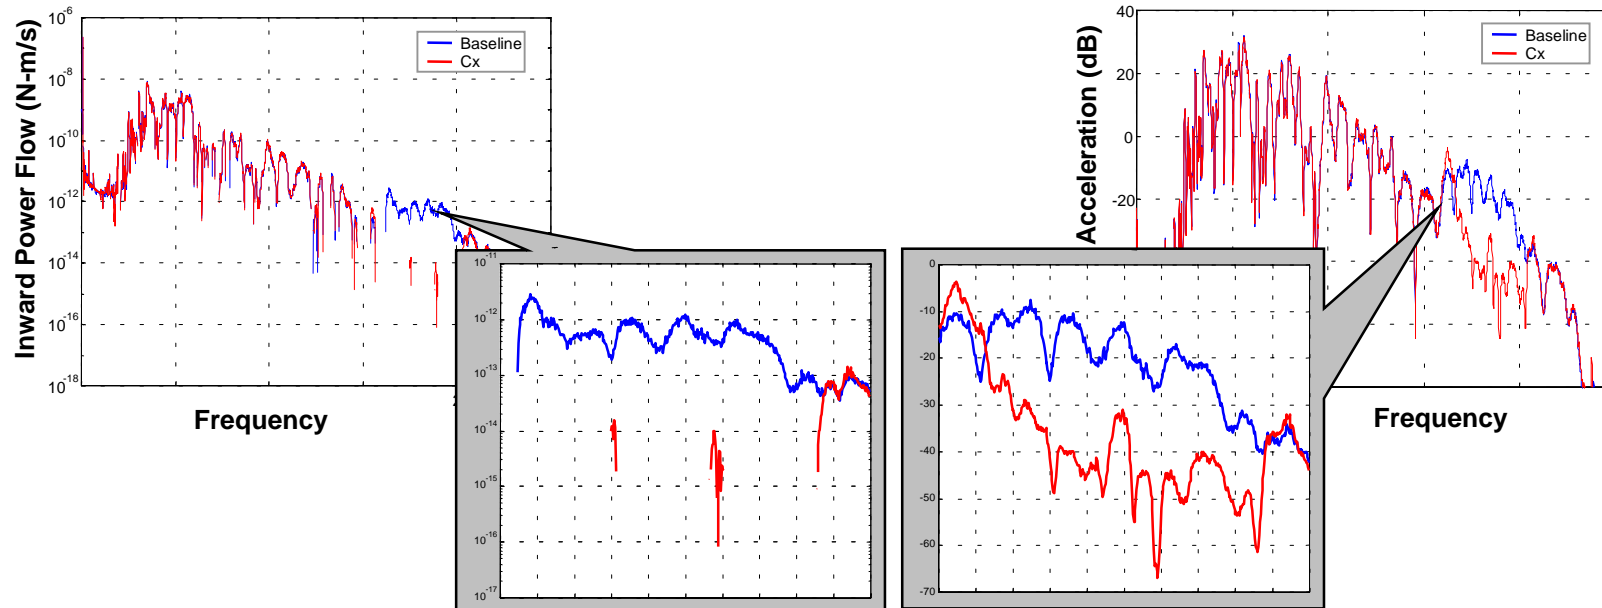

**Inward power flow measurement
(Regions of net outward flow not plotted)**

**Real time controller error sensor
spectra**

Controller uses SW selectable bands to create frequency band windows in the TBL noise. Power flow measurement verifies proper control operation. 18 dB cancellation performance.